

AEHL、AEEF 系列

Fig-1

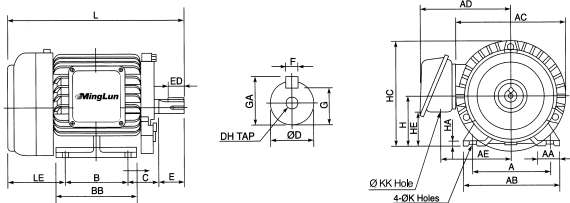


Fig-2

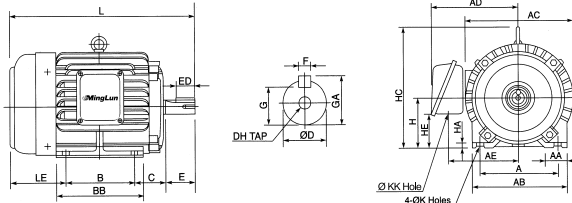


Fig-3


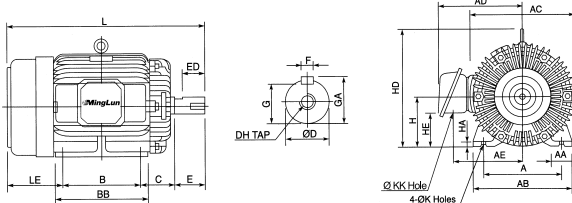


Fig-4

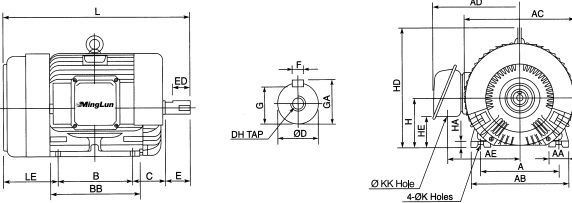

AEHL、AEEF 外型圖 Outline Dimensions

OUTPUT(HP) 輸出			FRAME 框號	FIGURE NO. 圖示	A	AA	AB	AC	AD	AE	B	BB	C	H	HA	HC	HD	HE	K	KK	L	LE	SHAFT END 軸端								BEARINGS 軸承		WEIGHT 重量
2P	4P	6P																					D	E	ED	F	G	GA	DH	LOAD SIDE	OUT OF LOAD SIDE	KGS	
0.25	0.25	-	63	1	100	28	120	144	123	93	80	100	40	63	8.0	135.0	-	29	7	22	219.0	76.0	11	23	18	4	8.5	12.5	M4X8	6201ZZ	6201ZZ	8.5	
0.5	0.5	0.25	71	1	112	35.5	140	162	133	103	90	115	45	71	8.0	152.0	-	54	7	22	250.5	85.5	14	30	25	5	11.0	16.0	M5X10	6203ZZ	6202ZZ	11.5	
1	1	0.5	80	1	125	35.5	155	177	144	112	100	130	50	80	9.0	168.5	-	55	10	22	282.5	92.5	19	40	35	6	15.5	21.5	M6X12	6204ZZ	6203ZZ	17.0	
2-3	2	1	90L	1	140	35.5	170	200	157	125	125	150	56	90	10.0	190.0	-	65	10	22	332.5	101.5	24	50	45	8	20.0	27.0	M8X16	6205ZZ	6204ZZ	24.0	
-	3	2	100L	2	160	45	195	219	180	145	140	175	63	100	12.5	-	243	71	12	28	374.5	111.5	28	60	55	8	24.0	31.0	M10X20	6206ZZ	6205ZZ	37.0	
5	5	3	112M	2	190	45	224	235	189	154	140	175	70	112	14.0	-	265	83	12	28	391.5	121.5	28	60	55	8	24.0	31.0	M10X20	6306ZZ	6305ZZ	46.0	
7.5-10	7.5	5	132S	2	216	45	250	273	225	180	140	175	89	132	16.0	-	310	83	12	35	454.0	145.0	38	80	75	10	33.0	41.0	M12X24	6308ZZ	6306ZZ	68.0	
-	10	7.5	132M	2	216	45	250	273	225	180	178	212	89	132	16.0	-	310	83	12	35	492.0	145.0	38	80	75	10	33.0	41.0	M12X24	6308ZZ	6306ZZ	79.0	
15-20	15	10	160M	3	254	50	300	334	263	218	210	250	108	160	18.0	-	377	108	14.5	35	608.0	180.0	42	110	105	12	37.0	45.0	M16X32	6309ZZ	6307ZZ	125.0	
25	20	15	160L	4	254	50	300	334	263	218	254	300	108	160	18.0	-	377	108	14.5	35	652.0	180.0	42	110	105	12	37.0	45.0	M16X32	6309ZZ	6307ZZ	140.0	
30	-	-	180MA	4	279	75	355	382	305	250	241	297	121	180	20.0	-	421	119	14.5	52	672.0	200.0	48	110	105	14	42.5	51.5	M16X32	6311ZZ	6310ZZ	179.0	
-	25-30	20	180MC	4	279	75	355	382	305	250	241	297	121	180	20.0	-	421	119	14.5	52	672.0	200.0	48	110	105	14	42.5	51.5	M16X32	6311ZZ	6310ZZ	195.0	
40	-	-	180LA	4	279	75	355	382	305	250	279	335	121	180	20.0	-	421	119	14.5	52	710.0	200.0	55	110	105	16	49.0	59.0	M20X40	6312ZZ	6310ZZ	198.0	
-	40	25-30	180LC	4	279	75	355	382	305	250	279	335	121	180	20.0	-	421	119	14.5	52	710.0	200.0	55	110	105	16	49.0	59.0	M20X40	6312ZZ	6310ZZ	223.0	

Remark : 1. Shaft dia "D" clearance : Ø11~Ø28 : J6, Ø38~Ø48 : K6 2. Shaft height "H" clearance : H⁺⁰_{-0.5} 3. The above mentioned value subject to change without notice